
On Pooling in Queueing Networks

Author(s): Avishai Mandelbaum and Martin I. Reiman

Source: *Management Science*, Vol. 44, No. 7 (Jul., 1998), pp. 971-981

Published by: INFORMS

Stable URL: <http://www.jstor.org/stable/2634511>

Accessed: 11/04/2010 06:22

Your use of the JSTOR archive indicates your acceptance of JSTOR's Terms and Conditions of Use, available at <http://www.jstor.org/page/info/about/policies/terms.jsp>. JSTOR's Terms and Conditions of Use provides, in part, that unless you have obtained prior permission, you may not download an entire issue of a journal or multiple copies of articles, and you may use content in the JSTOR archive only for your personal, non-commercial use.

Please contact the publisher regarding any further use of this work. Publisher contact information may be obtained at <http://www.jstor.org/action/showPublisher?publisherCode=informs>.

Each copy of any part of a JSTOR transmission must contain the same copyright notice that appears on the screen or printed page of such transmission.

JSTOR is a not-for-profit service that helps scholars, researchers, and students discover, use, and build upon a wide range of content in a trusted digital archive. We use information technology and tools to increase productivity and facilitate new forms of scholarship. For more information about JSTOR, please contact support@jstor.org.



INFORMS is collaborating with JSTOR to digitize, preserve and extend access to *Management Science*.

On Pooling in Queueing Networks

Avishai Mandelbaum • Martin I. Reiman

*Faculty of Industrial Engineering and Management, Technion, Haifa, Israel
Bell Labs, Lucent Technologies, Murray Hill, New Jersey 07974*

We view each station in a Jackson network as a queue of tasks, of a particular type, which are to be processed by the associated *specialized* server. A complete pooling of queues, into a single queue, and servers, into a single server, gives rise to an $M/PH/1$ queue, where the server is *flexible* in the sense that it processes all tasks. We assess the value of complete pooling by comparing the steady-state mean sojourn times of these two systems. The main insight from our analysis is that care must be used in pooling. Sometimes pooling helps, sometimes it hurts, and its effect (good or bad) can be unbounded. Also discussed briefly are alternative pooling scenarios, for example complete pooling of only queues which results in an $M/PH/S$ system, or partial pooling which can be devastating enough to turn a stable Jackson network into an unstable Bramson network. We conclude with some possible future research directions. (*Service Facility Design; Flexible Server; Specialized Server; Service Operations, Efficiency, Stability, Economics of Scale*)

1. Introduction

A fundamental problem in the design and management of stochastic service systems is that of pooling, namely the replacement of several ingredients by a functionally equivalent single ingredient. We analyze the pooling phenomenon within the framework of queueing networks where in our case, as will be explained momentarily, it can take one of three forms: pooling queues (the demand), pooling tasks (the process) or pooling servers (the resources). Here we consider pooling queues and servers simultaneously, but keep the task structure intact, and we provide an efficiency index (5) to determine when such pooling is or is not advantageous.

Our models are described in terms of customers who seek *service* provided by *servers*. Service amounts to a collection of *tasks*, of which there are a finite number of *types*. Two main models are considered: in the first *specialized* model, each task type has a server and a queue dedicated to it. For example, Figure 1 exhibits a queueing network in which every customer requires a service that constitutes three tasks, and the tasks are carried out successively, each by its own specialized server. Customers arrive at rate α , average task durations are m_k and servers' capacities are c_k . In the second

flexible model, servers are capable of handling all tasks and they collectively attend to a single queue of services. For example, Figure 2 exhibits such a model, which arises through pooling the tandem network from Figure 1: customers arrive at rate α , seeking the same three-task service as before; they all join a single queue, which is now attended by a single flexible server of capacity $\sum_k c_k$.

Customer arrivals are assumed Poisson and task durations exponential. (We comment on these distributional assumptions in the Addendum.) As articulated in §2, we allow a service to consist of a random sequence of tasks in a way that the service duration has a phase-type distribution (a phase corresponds to a task). The specialized (unpooled) model turns out to be a Jackson network (Jackson 1957), as in Figure 3, and the flexible (pooled) architecture is modeled by an $M/PH/1$ system (Neuts 1981) as in Figure 4.

In addition to the above two main models, we also consider briefly alternative designs of pooling. For example, Figure 5 depicts the network from Figure 1, with its queues pooled into a single queue and the servers made flexible while still maintaining their individual identities (see §5.3). Figure 6 depicts partial pooling of

Figure 1 A Specialized Model with Tasks Attended by Specialized Servers




Figure 2 A Flexible Model with Complete Pooling into a Single Queue and a Single Flexible Server




Figure 3 A Specialized Model with Task Repetition and Feedback


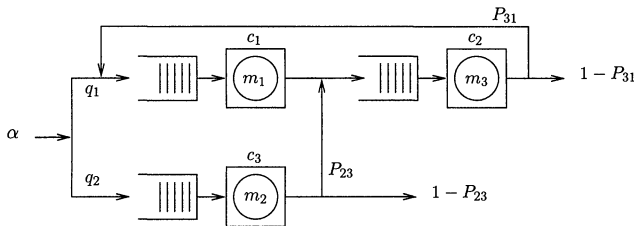


Figure 4 The Flexible Model, under Complete Pooling, that Corresponds to Figure 3

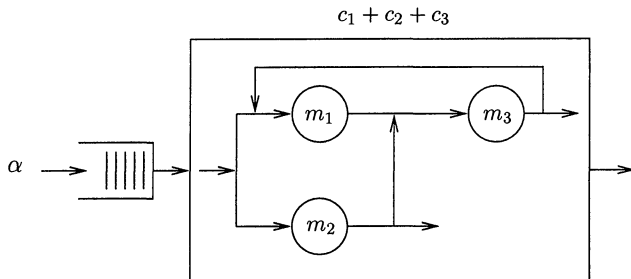

only queues and servers 1 and 2 (see §5.4). Figure 7 depicts a split of the service so that a customer, upon completion of a task, rejoins the queue (see §5.5), and additional designs are possible as well. A common feature of our models is that service is unaltered. For example, in Figures 1, 2, 5, 6, and 7, service always consists of tasks 1, 2, and 3 in succession.

1.1. Motivation

The present research arose from an analysis of a service network consisting of several specialized departments.

The network was redesigned as a pooled single department, which was still responsible for the same services, but whose servers were flexible enough to process all tasks. In trying to analyze this transition, we found that prevalent pooling models failed to cover our network scenario.

Our models provide a new simple framework that helps in assessing the effects on pooling of utilization, variability, and service design. While this is not aimed as a review paper, our framework also relates, as it happens, rather disparate concepts and results, for example (Bramson 1994, Jackson 1957, Klimov 1974, Neuts 1981, Smith and Whitt 1981, and Tcha and Pliska 1977). We believe that the usefulness of the framework goes beyond the original motivating applications, pertaining to the design of telephone call centers (Brigandi et al. 1994), evaluation of communication networks (Smith

Figure 5 Complete Pooling of Queues Only (Servers Are Made Flexible but Maintain Individual Identities.)

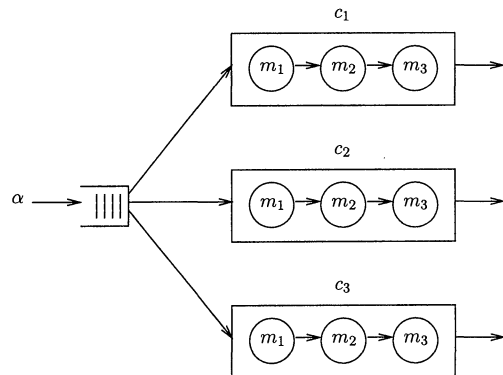


Figure 6 Partial Pooling





Figure 7 Splitting Services (Each Task Returns to the End of the Queue.)

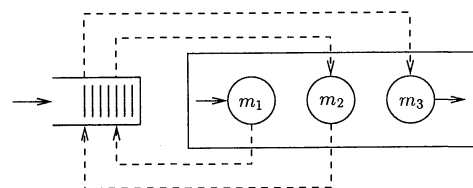

and Whitt 1981), evolution (growth) of computer systems (Kleinrock 1976), group-technology in manufacturing (Burbidge 1991), team-based product development (Adler 1995), business reengineering (Buzacott 1996, Hammer 1990, Hammer and Champy 1993, and Loch 1998) (elaborated on below), and more.

Prior work on pooling seems to fall mainly into two categories: pool queues or pool servers. (In most of our analysis we do both.) As an example, pooling only queues would change several $M/M/1$ queues, say K , with arrival rate λ and service rate μ into an $M/M/K$ queue with arrival rate $K\lambda$ and service rate μ ; results of this flavor are contained in (Rothkopf and Rech 1987 and Smith and Whitt 1981). Pooling only servers would change an $M/M/K$ queue with arrival rate λ and service rate μ into an $M/M/1$ queue with arrival rate λ and service rate $K\mu$; pooling of this type is considered in (Stidham 1970). For an illuminating depiction of these common pooling models, see (Kleinrock 1976), Figure 5.5. Pooling also arises as an asymptotic phenomenon under appropriate rescaling of time and space (Laws 1992, Reiman 1984, and Reiman and Simon 1990): for example, in heavy traffic, appropriate routing has the effect of pooling servers (hence, in heavy traffic, the performance of the systems in Figures 2 and 5 coincides).

Our paper is in concert with current emphasis on business process reengineering (Hammer 1990 and Hammer and Champy 1993). Indeed, referring to pooling as "integration of work," Loch (1998) predicts that "the one idea from the reengineering era most likely to persist is that of integrated work." Similarly, in summarizing (Hammer 1990 and Hammer and Champy 1993), Buzacott (1996) has "several tasks combined into one" as the first assertion of the superiority of a system that is designed using reengineering principles.

Both Buzacott (1994) and Loch (1998) use tasks in series and the transition from Figure 1 to Figure 5 as their paradigm for pooling in reengineering. It was shown in both Buzacott (1994) and Loch (1998) that the pooled system (with a single queue) is superior to the unpooled alternative, and higher task variability makes the advantage greater. The network-framework that we provide allows the results of Buzacott (1994) and Loch (1998) to be viewed in a more illuminating perspective. First we show, in §5.1, that pooling a tandem structure

is always advantageous but for more general architectures this need not be the case. In particular, it has been known (Smith and Whitt 1981) that pooling a parallel structure can sometimes hurt unboundedly (see §5.2); we add the observation that partial pooling can turn a stable system unstable (§5.3, based on results of Bramson (1994)). Second, the variability considered in Buzacott (1994) and Loch (1998) is only *task* variability. In general, however, there are additional sources of variability, and their effects on pooling, as we now discuss, can be opposite to the variability effects in Buzacott (1994) and Loch (1998). Variability may be either predictable or stochastic: first-order sources for predictable variability are service design (e.g. scheduling tasks in tandem vs in parallel) or heterogeneity across task types (e.g. varying means); second-order sources for stochastic variability are, for example, fluctuations of task durations within a task type (e.g. due to human factors).

Our framework allows the consideration of both predictable and stochastic service variability. The sources that we explore here, however, are mainly first-order *structural*, since the tasks that constitute a service are not altered. (Stochastic task variability is fixed by assuming an exponential duration for each task type.) In broad terms, with task variability fixed and workload approximately balanced, the design of the service determines its variability and, in turn, the effect of pooling: as servers' utilization increases and service variability *decreases*, pooling advantages are found to increase. This explains the apparent contradiction with the conclusion of Buzacott (1994) and Loch (1998). (Note that a balanced workload need not be optimal; see §4.)

1.2. Summary

The specialized and flexible models are introduced in §2. We start with a crude stability analysis in §2.3, showing that flexibility increases the workload that a specialized system can handle; see also §2.1 in Buzacott (1994).

In §3 we quantify the effects of pooling in terms of an efficiency index (5), which is the product of a utilization factor ϵ_u and a variability factor ϵ_v . We show that pooling always helps in light traffic, because a customer at the pooled system typically enjoys a service rate that is the total capacity of the specialized system. In heavy traffic, pooling effects can go either way.

For given arrivals and services, resource utilization is determined by how capacity is allocated among the servers. In §4 we use the square-root allocation of Kleinrock (1976) to show that optimal capacity allocation mitigates the advantage of pooling. This advantage also decreases as variability increases. Indeed, crude analysis of the efficiency index (5) reveals the insight that with low enough variability pooling is always advantageous.

In §5 we explore both network and pooling designs. Sections 5.1 and 5.2 treat tandem and parallel systems respectively. With tandem tasks the structural variability is small enough so that pooling always helps. For parallel tasks, as already discovered by Smith and Whitt (1981), the effect can go either way. In §5.3 we consider pooling queues only, as in Figure 5. Performance is worse than with pooled servers, with the difference being maximal in light traffic and diminishing in heavy traffic. In §5.4 we investigate the effect of pooling design by considering partial pooling, as in Figure 6. It turns out that one can interpret the recent results in Bramson (1994) to show that partial pooling can turn a stable system unstable. In §5.5 we require service splitting, as in Figure 7, rather than pursuing service until all of its tasks are completed. Through an example we show that the relative performance of these two systems depends on the structural variability of the total service time. There are numerous additional pooling issues that can be pursued, within the framework opened up here. Some are briefly discussed or mentioned in the concluding §6.

2. The Models

In our two models, customers arrive for service according to a Poisson process, at a rate of α per unit of time. A service constitutes a random sequence of tasks. There are K types of tasks, indexed by $k = 1, \dots, K$, and we refer to a task of type k as simply task k . The work content in task k is exponentially distributed with mean m_k . Let q_k be the probability that task k is first in a given service, and let P_{jk} be the probability that task k is a direct successor of task j ; $1 - \sum_{k=1}^K P_{jk}$ is therefore the probability that service ends after task j .

Assume that arrivals of customers are independent of services and that, within each service, sequencing of tasks and task durations are all mutually independent.

Also assume that each service constitutes a finite number of tasks with probability one; this is equivalent to the existence of the matrix

$$R = [I - P]^{-1},$$

where P is the K -dimensional matrix $P = [P_{jk}]$. (The element R_{jk} is the expected number of times that a task k is performed during a single service, given that j is the task to start that service.)

To sum up, customer arrivals are characterized by a scalar α , and services by a triplet (q, P, m) : $q^T = (q_1, \dots, q_K)$, $P = [P_{jk}]$ and $m^T = (m_1, \dots, m_K)$. (It is naturally assumed that $K \geq 2$, $\alpha > 0$, $m > 0$ and $q^T R > 0$.) Servers will be characterized momentarily, as they are model-dependent.

2.1. The Specialized Model

In the specialized model, every task k has a server k dedicated to it, whose service capacity is $c_k > 0$ units of work per unit of time. It follows that the processing times of task k by server k are i.i.d., each distributed exponentially with mean m_k / c_k . Furthermore, envisioning tasks of every type queueing up for processing at their respective dedicated servers, our specialized model reduces to an open Jackson network (Jackson 1957) with K single-server stations, arrival rates αq^T , service rates c_k / m_k and a routing matrix P . (See Figure 3.)

We assume that the specialized system is stable (ergodic). This entails that each server k has traffic intensity less than unity:

$$\rho_k^s = \frac{\lambda_k m_k}{c_k} < 1;$$

here $\lambda = \alpha q^T R$ is the vector whose k -th coordinate λ_k stands for the effective arrival rate (in units of task k) to server k . Equivalently, stability prevails if and only if

$$\alpha < \alpha^s = \bigwedge_k \frac{c_k}{(q^T R M)_k},$$

where M is the k -dimensional diagonal matrix, with $M_{kk} = m_k$, $k = 1, \dots, K$. This is a consequence of the representation

$$\rho_k^s = \alpha \frac{(q^T R M)_k}{c_k}.$$

2.2. The Flexible Model

In the flexible model, customers arrive for service as before, but now they obtain service from a single *flexible* server, whose service capacity is $c^T e$ (e is the k -dimensional vector of one's). Services are as above, hence the work content in services are i.i.d., each with a phase-type distribution (Neuts 1981) that is characterized by the triplet $(q, P, m / c^T e)$: there are K phases each corresponding to a task, the duration of phase k is exponential with mean m_k , the initial phase is chosen according to q and successive phases according to the routing matrix P . In other words, the flexible model reduces to an $M / PH / 1$ queue, in which the average work content in a service is $q^T R M e$ and the server's capacity is $c^T e$; the average service time is therefore $q^T R M e / c^T e$. (See Figure 4.) We assume that this queue is stable (ergodic), which entails that its traffic intensity satisfies

$$\rho^f = \alpha \frac{q^T R M e}{c^T e} < 1.$$

Equivalently, stability prevails if and only if

$$\alpha < \alpha^f = \frac{c^T e}{q^T R M e}.$$

2.3. Stability Analysis

The flexible system can handle any load that the specialized one can. This is formalized in terms of each of the following two inequalities:

$$\alpha^s \leq \alpha^f, \quad \text{or} \quad (1)$$

$$\rho^f \leq \bigvee_k \rho_k^s. \quad (2)$$

To verify (1), note that for any positive vectors a and b ,

$$\frac{a^T e}{b^T e} \in \left[\bigwedge_k \frac{a_k}{b_k}, \bigvee_k \frac{a_k}{b_k} \right], \quad (3)$$

since the left hand-side is a convex combination of $a_k / b_k, k = 1, \dots, K$, namely,

$$\frac{\sum_k a_k}{\sum_k b_k} = \sum_k \frac{b_k}{\sum_j b_j} \frac{a_k}{b_k}.$$

Letting $a_k = c_k$ and $b_k = (q^T R M)_k$ establishes (1). Similarly, letting $a_k = (q^T R M)_k$ and $b_k = c_k$ yields

$$\rho^f = \sum_k d_k \rho_k^s, \quad d_k = c_k / c^T e, \quad (4)$$

which implies (2).

If $\alpha > \alpha^f$ then the flexible and specialized models are both unstable (have no steady state), hence a steady-state comparison between them is vacuous. If $\alpha \in [\alpha^s, \alpha^f]$, then the specialized model is unstable while the flexible one is stable, in which case pooling is advantageous trivially. One is left with $\alpha < \alpha^s \leq \alpha^f$, which will be assumed from now on.

3. Performance Analysis

Let W^s and W^f denote the steady-state average sojourn-times in the specialized and flexible models respectively. Then

$$W^s = \frac{1}{\alpha} \sum_k \frac{\rho_k^s}{(1 - \rho_k^s)}$$

by Little's law and Jackson's characterization of individual stations as $M / M / 1$ queues in steady state. For the flexible model, the Pollaczek-Khintchine formula yields

$$W^f = E(S) \left[1 + \frac{\rho^f}{(1 - \rho^f)} \frac{1 + C^2(S)}{2} \right].$$

Here S is a phase-type random variable characterized by $(q, P, m / c^T e)$, whose moments are given by Neuts (1981)

$$E(S^n) = \frac{n!}{(c^T e)^n} q^T (R M)^n e, \quad n \geq 1,$$

and whose squared coefficient of variation is $C^2(S) = \text{Var}(S) / E(S)^2$. Define the *efficiency index* of pooling to be $\varepsilon = W^s / W^f$. Then pooling is advantageous, as far as average sojourn time is concerned, when $\varepsilon > 1$. Simple algebra leads to the representation

$$\varepsilon = \frac{\frac{1}{K} \sum_k \frac{\rho_k^s}{1 - \rho_k^s}}{\frac{\rho^f}{1 - \rho^f} + \frac{K}{(1 - \rho^f) + \rho^f \frac{1 + C^2(S)}{2}}}, \quad (5)$$

in which

$$\frac{1 + C^2(S)}{2} = \frac{E(S^2)}{2E(S)^2} = \frac{q^T (R M)^2 e}{(q^T R M e)^2}.$$

We write $\varepsilon = \varepsilon_u \varepsilon_v$, where

$$\varepsilon_u = \frac{\frac{1}{K} \sum_k \frac{\rho_k^s}{1 - \rho_k^s}}{\frac{\rho^f}{1 - \rho^f}} \quad \text{and} \quad \varepsilon_v = \frac{K}{(1 - \rho^f) + \rho^f \frac{1 + C^2(S)}{2}}$$

are the *utilization* index and *variability* index respectively. They represent the effects of utilization and variability on pooling efficiency, the analysis of which constitutes the rest of the paper.

Ranges of the Indices. The ranges are given by

$$\varepsilon_u \in \left(\frac{1}{K}, \infty \right), \quad \varepsilon_v \in (0, 2K),$$

and

$$\varepsilon \in (0, \infty);$$

the indices can take on all values within the specified intervals, and the end-points of the intervals provide tight asymptotic bounds. To elaborate, let

$$f(x) = \frac{x}{(1 - x)}, \quad 0 \leq x < 1,$$

a strictly convex, strictly increasing function with $f(0) = 0$ and $f(1-) = \infty$. Then, using (4), these properties imply

$$\begin{aligned} \varepsilon_u &= \frac{\frac{1}{K} \sum_k f(\rho_k^s)}{f(\sum_k d_k \rho_k^s)} > \frac{\frac{1}{K} \sum_k f(\rho_k^s)}{\sum_k d_k f(\rho_k^s)} \\ &\geq \frac{1}{K} \frac{c^T e}{\vee_k c_k} \geq \frac{1}{K}. \end{aligned}$$

One way for $\varepsilon_u \downarrow 1/K$ is to let $\rho_k^s \downarrow 0$, for all $k \geq 2$, while maintaining $\rho^f \approx \rho_1^s$, both being bounded away from 0. This requires that $c_1/c^T e \uparrow 1$. On the other hand, $\varepsilon_u \uparrow \infty$, for example, as $\alpha \downarrow 0$, $\alpha/c_k \downarrow 0$ for all k , and $c_j/c_k \uparrow \infty$ for some pair $j \neq k$.

Turning to ε_v , the upper-bound $2K$ is an immediate consequence of $C^2(S) \geq 0$ and $\rho^f \leq 1$. The lower bound 0 is approached as $C^2(S) \uparrow \infty$ while maintaining ρ^f bounded away from 0. Finally, the ranges of ε will emerge during later analysis.

Observations on Variability and Utilization. If variability is low enough, formally if $C^2(S) < 1$, then $\varepsilon > 1$ since $\varepsilon_v > K$; in other words pooling is advanta-

geous. If utilization is balanced, formally if $\rho_k^s = \rho_j^s, \forall j, k$, (hence also $\rho^f = \rho_k^s, \forall k$), then $\varepsilon_u = 1$ and pooling efficiency is determined by the variability index. In particular, increasing utilization ($\rho^f \uparrow 1$) and reducing variability ($C^2(S) \downarrow 0$) attains the maximum pooling efficiency achievable under balanced utilization ($2K$).

Light Traffic. In light traffic, the pooled system is always better because its customers are served at the pooled capacity of all specialized servers. Formally, light traffic prevails as $\alpha \downarrow 0$, while keeping the other parameters unaltered. Let $\varepsilon = \varepsilon(\alpha)$ in (5). Then

$$\lim_{\alpha \downarrow 0} \varepsilon(\alpha) = \sum_k \frac{(q^T RM)_k}{c_k} \bigg/ \frac{q^T RMe}{c^T e} > 1, \quad (6)$$

since the limiting efficiency belongs to the interval

$$\left[\frac{c^T e}{\vee_k c_k}, \frac{c^T e}{\wedge_k c_k} \right],$$

in view of (3). Pooling, therefore, is always better in light traffic, and it is K times better when the c_k 's are all equal.

Equation (6) can be explained with the light traffic theory of Reiman and Simon (1989). The light traffic limit of the mean sojourn time is the mean sojourn time of a single customer that moves alone through the system. For the pooled system, this time is $q^T RMe/c^T e$. For the specialized system, the mean sojourn time is $\sum_k (q^T RM)_k/c_k$, since the k -th summand is the total time at station k .

Heavy Traffic. There are two cases of heavy traffic: $\alpha^s = \alpha^f$ and $\alpha^s < \alpha^f$. We consider the case $\alpha^s = \alpha^f$ here, and treat $\alpha^s < \alpha^f$ at the end of §4. The equality $\alpha^s = \alpha^f$ occurs if and only if $\alpha^s = c_k/(q^T RM)_k$ for all k , in which case $\rho_k^s = \rho^f$ for all k . Let $\varepsilon = \varepsilon(\rho)$ in (5), where ρ denotes the common utilization. Then $\varepsilon_u = 1$, and

$$\lim_{\rho \uparrow 1} \varepsilon(\rho) = \frac{2K}{1 + C^2(S)}.$$

This finite limit prevails even though, as $\rho \uparrow 1$, both $W^s(\rho)$ and $W^f(\rho)$ grow unboundedly. Indeed, as $\rho \uparrow 1$,

$$(1 - \rho)W^s(\rho) \rightarrow KE(S),$$

$$(1 - \rho)W^f(\rho) \rightarrow E(S) \frac{1 + C^2(S)}{2}.$$

4. Division of Work or Capacity Allocation

Fix α, q, P and m . Introduce an additional scalar $\gamma > 0$, to be interpreted as total available service capacity, and consider positive vectors c such that $c^T e = \gamma$. As before, $\rho^f = \alpha q^T R M e / c^T e = \sum_k \lambda_k m_k / c^T e < 1$, hence ρ^f is fixed, $\gamma > \sum_k \lambda_k m_k$, and ε_v is also fixed. It follows that, as a function of c , the index $\varepsilon = \varepsilon(c)$ is minimized by the solution to

$$\min_c \sum_k \frac{\lambda_k m_k}{c_k - \lambda_k m_k},$$

$$\text{s.t. } \sum_k c_k = \gamma, \quad c \geq 0.$$

This is Kleinrock's well-known capacity allocation problem [Kleinrock (1976), §5.7], solved by the "square-root" allocation

$$c_k = \lambda_k m_k + \left(\gamma - \sum_j \lambda_j m_j \right) \frac{\sqrt{\lambda_k m_k}}{\sum_j \sqrt{\lambda_j m_j}}.$$

The corresponding value of ε is given by the product of ε_v , in which $\rho^f = m^T \lambda / \gamma$, with

$$\varepsilon_u = \frac{\frac{1}{K} (\sum_k \sqrt{\lambda_k m_k})^2}{\sum_k \lambda_k m_k} = \frac{\frac{1}{K} (\sum_k \sqrt{(q^T R M)_k})^2}{\sum_k (q^T R M)_k} \leq 1. \quad (7)$$

The last inequality is a simple consequence of the Cauchy-Schwartz inequality, that also guarantees equality to unity if and only if $(q^T R M)_k = (q^T R M)_j, \forall k, j$, in which case also $c_k = c_j, \forall k, j$. The quantity $(q^T R M)_k$ represents the amount of work of task k that is embodied in an arrival. Hence, under the optimal capacity allocation, $\varepsilon_u = 1$ if and only if workload and capacity are both balanced.

Optimal capacity allocation typically results in uneven utilization of the servers (see also Calabrese (1992) and Hillier and So (1991)), which in turn is associated with a smaller benefit from pooling. That is indicated by (7), from which it follows that $\varepsilon \leq 2K$; in words, pooling benefits do not exceed $2K$. This upper bound can be approached only in a balanced system that is both heavily utilized ($\rho^f \uparrow 1$) and almost deterministic ($C^2(S) \downarrow 0$).

Heavy Traffic, Continued. We can now treat the other case of heavy traffic, $\alpha^s < \alpha^f$. If $\alpha^s < \alpha^f$, and $\alpha \in [\alpha^s, \alpha^f)$, as observed in §1, the specialized model explodes while the flexible one is stable, so pooling is trivially advantageous. To allow for a meaningful comparison, fix q, P, M and total capacity γ , then assume that for each α , the specialized system employs the corresponding optimal capacity allocation. This makes α^s a function of α , enforcing $\alpha^s(\alpha) \uparrow \alpha^f$, as $\alpha \uparrow \alpha^f$. Thus, both the specialized and flexible system approach heavy traffic, in a way that

$$\lim_{\rho^f \uparrow 1} \varepsilon(\rho^f) = \frac{\frac{1}{K} (\sum_k \sqrt{(q^T R M)_k})^2}{\sum_k (q^T R M)_k} \frac{2K}{1 + C^2(S)},$$

by (5) and (7). The discussion that follows (7) applies here as well.

5. Design

This section is devoted to some effects of network design on pooling efficiency. In §§5.1 and 5.2 respectively, we consider tasks that are processed in tandem and parallel. The pooling of queues only, as depicted in Figure 5, is briefly discussed in §5.3. We then highlight possible negative effects of poor pooling design (with partial pooling) in §5.4. In §5.5 we consider the effect of having customers rejoin the queue for each task.

5.1. Tandem Tasks

Here $C^2(S)$ is small enough to render pooling always advantageous. Indeed, for K tasks in tandem, $q_1 = 1$ (so $q_k = 0, k \geq 2$), $P_{k,k+1} = 1$ for $k < K, \rho_k^s = \alpha m_k / c_k, \rho^f = \alpha m^T e / c^T e$, and $C^2(S) = m^T m / (m^T e)^2 \leq 1$. It follows that $\varepsilon_v \geq K$, hence $\varepsilon \geq 1$ since $\varepsilon_u \geq 1/K$ always.

5.2. Parallel Tasks

Here the effect of pooling can be good or bad. For K tasks in parallel (each service consists of exactly one task, which is task k with probability q_k), $P = 0, \rho_k^s = \alpha q_k m_k / c_k, \rho^f = \alpha q^T m / c^T m$. The service time of the pooled system is hyper-exponential, hence $C^2(S) \geq 1$. This also follows immediately from

$$\frac{1 + C^2(S)}{2} = \frac{\sum_k q_k m_k^2}{(\sum_k q_k m_k)^2} \geq 1, \quad (8)$$

where the last inequality is a consequence of viewing

$\sum_k^K q_k m_k$ and $\sum_k^K q_k m_k^2$ as the first and second moments of a discrete random variable.

From $C^2(S) \geq 1$ it follows that $\epsilon_v \leq K$. Under optimal capacity allocation, in fact $\epsilon \leq K$ by $\epsilon_u \leq 1$. The upper bound K is attained, for example, as follows: $\epsilon_v = K$ when $m_k = m, \forall k$, since then $C^2(S) = 1; \epsilon_u = 1$ by letting also $q_k = 1/K, \forall k$.

We now show that it is possible for a pooled system to be arbitrarily worse than the specialized one. To this end, we achieve $\epsilon \downarrow 0$ by constructing families of parallel systems that adhere to optimal capacity allocation, implying $\epsilon_u \leq 1$, while having ρ^f fixed and $C^2(S) \uparrow \infty$, implying $\epsilon_v \downarrow 0$.

One way is to follow Smith and Whitt (1981), where there exist tasks which are both rare and "challenging". Such tasks rarely challenge the specialized system but, when pooled, they delay all other tasks sufficiently to render pooling inefficient, unboundedly. The driver is variability, made high enough for $\epsilon \downarrow 0$. To be specific, vary q_k and m_k in a way that does not change the K products $q_k m_k$; simultaneously let, say, $m_1 \uparrow \infty$, while maintaining m_k / m_1 bounded for all $k \geq 2$; α is fixed to guarantee stability. ($q_1 \downarrow 0$ by $\rho_1^s = \alpha q_1 m_1 / c_1 < 1$ and $m_1 \uparrow \infty$, thus tasks of type 1 are both rare and challenging.) It follows that ρ^f , the optimal capacity allocation, and the denominator in (8) are all constant, but $C^2(S) \uparrow \infty$ with the numerator of (8).

A second way is to have slow servers in addition to challenging customers. Specifically, in an optimal allocation, take $c_1 \uparrow \gamma$ and $q_1 \downarrow 0$ (hence $\sum_{k \geq 2} c_k \downarrow 0$ and $\sum_{k \geq 2} q_k \uparrow 1$: the servers 2, . . . , K are the slow ones), while maintaining ρ_1^s bounded away from 1. One can then show that $q_k m_k / q_1 m_1 \rightarrow 0, \forall k \geq 2$. By (8)

$$\frac{1 + C^2(S)}{2} \geq \frac{1 / q_1}{(1 + \sum_{k \geq 2} q_k m_k / q_1 m_1)^2},$$

verifying that, again, $C^2(S) \uparrow \infty$.

5.3. Heterogeneous Servers

There are situations in which servers cannot be pooled into a single server and, while still flexible, they must retain their individual identities. The flexible model would thus become a multi-server single station ($M/G/S$), with phase-type service and possibly heterogeneous servers, as depicted in Figure 3. Both systems enjoy the same stability region [4], nevertheless perfor-

mance is now worse than with a single server because service is not always rendered at the maximal capacity $c^T e$. (This can be verified through coupling.)

A comparison between our specialized system and a flexible system with heterogeneous servers would require formulae for the $M/PH/S$ queue with heterogeneous servers. Such formulae do not exist so we restrict our attention below to light and heavy traffic. In specific cases, there exists approximations which enable certain (approximate) comparisons. For example, Buzacott (1996) uses second-moment approximations to compare series systems (as in Figures 1 and 3) while varying stochastic variability of tasks.

In light traffic, the performance of the single server could be made better than the heterogeneous system by a factor of $c^T e / \sqrt{k} c_k$. Indeed, by the light-traffic rationale (Reiman and Simon 1989), the mean sojourn time of the single-server system is $E(S) / c^T e$. For the heterogeneous system, assume that services are always performed by the fastest available server. The mean sojourn time, in light traffic, is then $E(S) / \sqrt{k} c_k$, which yields the above factor.

The heavy traffic limit of the single server and the heterogeneous system coincide (Iglehart and Whitt 1970). One expects, therefore, that the difference in performance between the systems is maximal in light traffic, and it diminishes as utilization increases to heavy traffic. A precise justification would require a comparison via stochastic ordering.

5.4. Partial Pooling

In partial pooling, K specialized servers are pooled into $K' < K$ servers, typically more flexible, thus resulting in a queueing network with K' stations. In this section we show, by way of examples, that it is possible for partial pooling to make a stable system unstable. Our examples are based upon networks introduced by Bramson (1994), which have opened up a yet uncharted research territory.

We start with a specialized system that is a tandem network, as in §5.1, with K taken odd for notational convenience. Let

$$\begin{aligned} \alpha &= 1; \quad m_2 = m_K = d, \quad m_k = \delta, \quad k \neq 2, K; \\ c_1 &= 2\delta, \quad c_2 = 1 - (K - 3)\delta, \\ c_3, c_5, \dots, c_{K-2} &= 2/(K - 3), \end{aligned}$$

$$c_4, c_6, \dots, c_{K-1} = 2\delta,$$

$$c_K = 1 - 2\delta.$$

Bramson (1994) chose first $399/400 \leq d < 1$, then K large enough for $d^{K-2} < 1/50$, and finally δ small enough so that $0 \leq \delta < (1 - d)/50(K - 2)^2$. The specialized network is, therefore, stable and its (complete) pooling, as in §5.1, is advantageous.

We consider now two (related) poolings. In the first, the K servers are pooled into 3 servers as follows: server 1 attends to tasks 1 and K ; server 2 serves tasks 2, 4, . . . , $K - 1$; server 3 cares for tasks 3, 5, . . . , $K - 2$. Thus, a customer starts with server 1, moves on to 2, then 3, back to 2, and so on, until service $K - 1$ at server 2, then the last service back at 1 and finally out. Each server uses the FIFO discipline, under which Bramson (1994) proved that the network is unstable. (See his comment, immediately following the statement of Theorem 1.) In particular, with probability 1, the sojourn time of customers increases to infinity, as $t \uparrow \infty$. Instability arises because the system roughly alternates between busy periods of server 2, attending mainly to incoming tasks 2 while starving server 1, and busy periods of server 1, attending to tasks K while starving server 2. The starvation of both servers is a consequence of FIFO, under which ample δ -tasks are forced into queueing behind few d -tasks. (A more refined and quantitative intuition is provided in Bramson (1994).)

The second pooling is into 2 servers as follows: server 1 serves tasks 1 and K and server 2 attends to the rest. The service discipline is again FIFO, where immediate feedbacks at server 2 (of tasks 2, . . . , $K - 2$) join the end of the queue, upon service completion. (There were no immediate feedbacks in our first example.) Thus, a service starts at server 1, moves on to 2 where it cycles for $K - 2$ times, then back to 1 and out. Again, such a network was proved unstable in Bramson (1994), Theorem 1, following the same rationale as above.

In the second pooling, server 2 could have served tasks 2, . . . , $K - 2$ of a given service in succession, rather than separating the service so that a task joins the end of the queue upon service completion. Then the system would have been stable (Baccelli and Foss 1996), which gives rise to the general issue of splitting services. We address this next.

5.5. Splitting Services

Suppose that, after a task completion, each customer returns to the end of the (single) queue; see Figure 7. Thus, the queue consists of services that are at different stages of their processing. Although such a protocol seems naive, there are circumstances under which it is superior (in terms of mean wait) to having services carried out in an uninterrupted manner. For its performance analysis, one must retain task-identities in queue. An exact analysis is then possible (Simon 1984), in terms of a set of linear equations whose solution yields mean waiting times. More explicit results can be obtained in heavy traffic (Dai and Kurtz 1995 and Reiman 1988). We just examine a special case, with the aim of showing that the advantage can go either way.

In our special case, all tasks have exponential service requirements with the same mean, m . This gives rise to a product-form system (Baskett et al. 1975 and Kelly 1979), under which the distribution of total queue length is that of an $M/M/1$ queue with traffic intensity ρ^f . The sojourn time per 'pass' is thus $m/[c^T e(1 - \rho^f)]$, and the mean number of passes through the queue is $q^T Re$. If we let W^n denote the mean sojourn time in the naive system, we obtain

$$W^n = \frac{m}{c^T e} q^T Re \left[1 + \frac{\rho^f}{1 - \rho^f} \right].$$

For this case, $M = mL$, implying that

$$W^f = \frac{m}{c^T e} q^T Re \left[1 + \frac{\rho^f}{1 - \rho^f} \frac{1 + C^2(S)}{2} \right].$$

We thus see that W^n is less than (resp. equal to, greater than) W^f if $C^2(S) > 1$ (resp. $C^2(S) = 1$, $C^2(S) < 1$): the naive protocol is superior under high variability. Note that, in this special case, $W^n \leq W^s$. (The comparison amounts to the inequality $\mathcal{E}_\mu \geq 1/K$, which was established in §3.)

6. Addendum

We conclude the paper with a discussion of our distributional assumptions and possible further research directions.

Distributional Assumptions. Only the exponential tasks require an elaboration since the role of the Poisson process as a model for exogenous random arrivals is

well established. Empirical experience (Asmussen et al. 1994 and Mandelbaum 1994) with human services supports the phase-type service structure, as evidence suggests that homogeneous human tasks are surprisingly often exponential. Admittedly, however, exponentially distributed task times will not be a good assumption for all applications. Then the simplicity of the resultant analysis becomes a driving motivation: explicit results make it easier to obtain insights from the analysis. (One could in fact analyze generally distributed tasks, in the spirit of Buzacott (1996), Wein (1989), and Whitt (1983) and in analytical support of Loch (1998); this would require approximations of nonparametric Jackson networks and it is left as a possible avenue for future research.) Although there is a basis for questioning the universality of exponentially distributed task times, it should be pointed out that the distribution of the total service time as a phase-type distribution is not a practical restriction because phase-type distributions are dense in the set of all distributions (see, for example Asmussen (1987)).

Stochastic Ordering. Most of our results invite finer comparisons, via various stochastic ordering schemes. For example, under what conditions would complete pooling of a tandem network lead to stochastically smaller sojourn times? (For an example of this type of result, see Buzacott et al. (1994), Example 1.7.1.) Beyond the basic assessment of flexible vs. specialized models, other possibilities include parametric analysis, from light to heavy traffic (see the discussion at the end of §5.3) or an investigation of the effects of task-variability, for example refining Buzacott (1996).

Control. It is possible to maintain identities of tasks, or customer-types. One reason is to identify the types that benefit and those that suffer from pooling. More generally, this enables the incorporation of control (admission, sequencing, routing), with the goal of improving performance. Recall the devastating effects of FIFO, within the partial pooling of §5.3. Also note that pooling all servers into a single server while maintaining task identities raises the question of task sequencing, as analyzed in Harrison (1975a), Harrison (1975b), Klimov (1974), and Tcha and Pliska (1977). With appropriate sequencing control (allowing preemption) the pooled

system can always be made at least as good as the unpooled system. This is achieved by reproducing in the pooled system (using preemption) the performance of the original unpooled system. Preemption plays an important role here because with it certain customer types can be made effectively invisible to some other types, thus preventing the phenomenon of “challenging” tasks from §5.2. (The well-known formula for the waiting times in the $M/G/1$ queue with nonpreemptive priorities (Kleinrock 1976) allows the reproduction of the arguments from §5.2.)

Economies of Scale. Consider a parallel specialized network, with statistically identical tasks and servers (equal m_k 's and c_k 's). Then $\varepsilon = K$ since $\varepsilon_u = 1$ and $C^2(S) = 1$. In words, pooling advantage equals the number of servers pooled. This is a manifestation of economies of scale because the pooled larger-scale system can achieve, with higher utilization, the service level provided by the specialized system. Such higher utilization could be the outcome of reduced capacity, hence reduced cost. In the spirit of reengineering (Loch 1998), one often seeks to take advantage of economies of scale (increasing K by pooling), in a way that outweighs the variability overhead that ensue ($C^2(S)$ increasing). The desirable outcome is an operation that is as efficient as mass production (ρ^f near unity) and as flexible as customized services (large $C^2(S)$), yet provides a very high operational service level (fast response, due to short and predictable sojourn times.)

The notion of flexible specialization (Priore and Sabel 1984) or mass customization is a current key concept in manufacturing strategy. This is also a main goal in the design of distributed telephone call centers (Brigandi et al. 1994) and packet switches for integrated broadband telecommunication networks (Schwartz 1996). The main obstacle to achieving this goal is the significant transactional overhead that arises due to pooling. Consider, for example, the time-overhead required for matching queueing customers to servers that become idle, in a face-to-face service operation with, say, 20 servers in parallel that attend to a single queue. Another interesting example involving overhead is to trade off transportation times in the specialized model (adding ample-server stations) against set-up times in the flexible model, due to switching among task-types.

The general issue here is cost/benefit analysis of economies of scale (increasing K or ρ^f) in the presence of various pooling-dependent constraints and overheads. Special attention can be given to specific topologies, for example hub-networks.

More Networks. Analyze pooling within queueing networks that are richer in features and capabilities, for example fork-join networks, where one must also trade off the effects of coordination and synchronization; or finite-buffer networks, with various blocking protocols, giving rise to the option of pooling buffers.¹

¹ The comments of the area editor, associate editor and two anonymous referees helped turn a rather different first version of the paper into its more readable, so it is hoped, present form.

Part of the research of A.M. was carried out while visiting Bell Labs. The hospitality of the "Mathematics of Networks and Systems Research Department" is greatly appreciated.

References

- Adler, P. S., A. Mandelbaum, V. Nguyen, and E. Schwerer, "From Project to Process Management: An Empirically Based Framework for Analyzing Product Development Time," *Management Science*, 41 (1995), 458–484.
- Asmussen, S., *Applied Probability and Queues*, Wiley, New York, 1987.
- Asmussen, S., O. Nerman, and M. Olsson, *Fitting Phase Type Distributions via the EM Algorithm*, Preprint ISSN 0347-2809, Chalmers Univ., Goteborg, Sweden, 1994.
- Bacelli, F. and S. Foss, private communication, 1996.
- Baskett, F., K. M. Chandy, R. R. Muntz, and F. G. Palacois, "Open, Closed and Mixed Networks of Queues with Different Classes of Customers," *J. Assoc. Comput. Mach.*, 22 (1975), 248–260.
- Bramson, M., "Instability of FIFO Queueing Network," *Ann. Appl. Prob.*, 4 (1994), 414–431, (correction on p. 952).
- Brigandi, A. J., D. R. Dargon, M. J. Sheehan, and T. III Spencer, "AT&T's Call Processing Simulator (CAPS): Operational Design for Inbound Call Centers," *Interfaces*, 24 (1994), 6–28.
- Burbidge, J. L., "Production Flow Analysis for Planning Group Technology," *J. Operations Management*, 10 (1991), 5–27.
- Buzacott, J. A., J. G. Shanthikumar, and D. D. Yao, "Jackson Network Models of Manufacturing Systems," in D. D. Yao (Ed.), *Stochastic Modeling and Analysis of Manufacturing Systems*, Springer, New York, 1994.
- , "Commonalities in Reengineered Business Processes: Models and Issues," *Management Sci.*, 42 (1996), 768–782.
- Calabrese, J. M., "Optimal Workload Allocation in Open Networks of Multiserver Queues," *Management Sci.*, 38 (1992), 1792–1802.
- Dai, J. G. and T. G. Kurtz, "A Multiclass Station with Markovian Feedback in Heavy Traffic," *Math. of Oper. Res.*, 20 (1995), 721–742.
- Hammer, M., "Reengineering Work: Don't Automate, Obliterate," *Harvard Business Rev.*, July–August 1990, 104–112.
- and J. Champy, *Reengineering the Corporation: A Manifesto for Business Revolution*, Harper Business, New York, 1993.
- Harrison, J. M., "A Priority Queue with Discounted Linear Costs," *Oper. Res.*, 23 (1975), 260–269.
- , "Dynamic Scheduling of a Multiclass Queue: Discounted Optimality," *Oper. Res.*, 23 (1975), 270–282.
- Hillier, F. S. and K. L. So, *On the Simultaneous Optimization of Server and Work Allocations in Production Line Systems with Variable Processing Times*, presented at ORSA/TIMS meeting, Anaheim, CA, 1991.
- Iglehart, D. L. and W. Whitt, "Multiple Channel Queues in Heavy Traffic, I and II," *Adv. in Applied Prob.*, 2 (1970), 150–177 and 355–364.
- Jackson, J. R., "Networks of Waiting Lines," *Oper. Res.*, 5 (1957), 518–521.
- Kelly, F. P., *Reversibility and Stochastic Networks*, Wiley, New York, 1979.
- Kleinrock, L., *Queueing Systems, Vol. II: Computer Applications*, Wiley, New York, 1976.
- Klimov, G. F., "Time Sharing Service Systems I," *Theory of Probability and its Applications*, 19 (1974), 532–551.
- Laws, C. N., "Resource Pooling in Queueing Networks with Dynamic Routing," *Adv. Appl. Prob.*, 24 (1992), 699–726.
- Loch, C. H., "Operations Management and Reengineering," *European Management J.*, 16 (1998), to appear.
- Mandelbaum, A., *Service Networks: Modelling, Analysis and Inference*, workshop on stochastic networks, IMA, Minneapolis, MN, 1994.
- Neuts, M. F., *Matrix-Geometric Solutions in Stochastic Models*, Johns Hopkins Univ. Press, Baltimore, MD, 1981.
- Priore, M. J. and C. F. Sabel, *The Second Industrial Divide: Possibilities for Prosperities*, Basic Books, New York, 1984.
- Reiman, M. I., "A Multi-Class Feedback Queue in Heavy Traffic," *Adv. Appl. Prob.*, 20 (1988), 179–207.
- , "Some Diffusion Approximations with State Space Collapse," in F. Baccelli and G. Fayolle (Eds.), *Modelling and Performance Evaluation Methodology*, Springer, New York, 1984.
- and B. Simon, "A Network of Priority Queues in Heavy Traffic: One Bottleneck Station," *Queueing Systems*, 6 (1990), 33–58.
- and —, "Open Queueing Systems in Light Traffic," *Math. Oper. Res.*, 14 (1989), 26–59.
- Rothkopf, M. H. and P. Rech, "Perspectives on Queues: Combining Queues is not Always Beneficial," *Oper. Res.*, 35 (1987), 906–909.
- Schwartz, M., *Broadband Integrated Networks*, Prentice Hall, Englewood Cliffs, NJ, 1996.
- Simon, B., "Priority Queues with Feedback," *J. Assoc. Comput. Mach.*, 31 (1984), 134–149.
- Smith, D. R. and W. Whitt, "Resource Sharing for Efficiency in Traffic Systems," *Bell System Tech. J.*, 60 (1981), 39–55.
- Stidham, S. Jr., "On the Optimality of Single-server Queueing Systems," *Oper. Res.*, 18 (1970), 708–732.
- Tcha, D.-W. and S. R. Pliska, "Optimal Control of Single-server Queueing Networks and Multiclass $M/G/1$ Queues with Feedback," *Oper. Res.*, 25 (1977), 248–258.
- Wein, L. M., "Capacity Allocation in Generalized Jackson Networks," *O. R. Letters*, 8 (1989), 143–146.
- Whitt, W., "The Queueing Network Analyzer," *Bell System Tech. J.*, 62 (1983), 2779–2815.

Accepted by Linda V. Green; received March 21, 1996. This paper has been with the authors 10 months for 1 revision.